

Domestic Hand Lifts

Business Hand Lifts

Power-Lift (Scissor)

Microlift (Waist Level)

Trolley Lift (Floor Level)

BKG Lift (Waist Level)

BKG Lift (Floor Level)

BKG Under Bar Lift

+44 (0)20 7732 4444

www.george-johnson-lifts.com



- COST EFFECTIVE SOLUTIONS •
- EFFICIENT WORK SPACE •
- TIME SAVING TRANSPORT •
- UP-TO-DATE CONSTRUCTION •
- EXPERIENCED ENGINEERS •

Specifically designed with the motor below enabling it to fit under a counter at the upper level.

PHONE NOW FOR A QUOTATION

020 7732 4444

BKG ELECTRIC SERVICE LIFTS


CUSTOM
BUILT

UNDER BAR

CAPACITY	100 kg
STRUCTURE	Fitted with a galvanised self supporting steel structure. Cladding around the lift by others.
FLOORS SERVED	2 or 3 levels.
ENTRANCE ORIENTATION	Can be loaded at front only, or front and back.
SPEED	0.45 m/sec.
HEADROOM	1000 mm as standard.
CAR	Steel panel construction, finishes of galvanised or zintec sheet steel with stainless steel as an option. Removable shelves are available.
CAR DOORS	Not available. Upstands to floor and shelves necessary when open front and back. Hinged drop bars are available but only suitable for large boxed loads.
CLEAR ENTRANCE	The clear width of the landing doors match the width of the lift car.
LANDING ENTRANCES	Steel bi-parting landing shutter and surround at lower level. Single hinged steel door at uppermost level. Shutters and doors available in galvanised, zintec or stainless steel finish. Fire rating also available.
SERVING HEIGHT	A minimum of 900 mm at lower level. Floor level at uppermost floor.
OPERATION	Fully automatic push buttons for every landing to enable a complete call and send facility.
INDICATORS	Illuminating push buttons and indicators denote car position. 'Call Accepted' and 'Lift In use' indicator fitted which also doubles as a door open alarm push button.
DRIVING UNIT	Smooth running motor unit fitted at the base of the lift shaft.
MACHINE COMPARTMENT DOOR	Single hinged machine compartment door provided, beneath the bottom floor entrance shutter, finishes as landing doors, fire rating available.
ELECTRIC SUPPLY	3 phase electric supply is preferable but 1 phase can be accommodated.
BUILDERS WORK	The necessary Associated Builders Work in connection with, but not included in, the supply of the lift is :- <ul style="list-style-type: none">• Cutting the hole through the floor / floors.• Enclosing the lift on all four sides at all floors, fire rated to comply with Local Authority requirements.• Running of electric supply to lift.

BKG Under Bar Lift

Model:	100.45/48
Capacity:	100kg
Car Width: A	600
Car Depth: B	500
Car Height: C	700
Car Doors: *	-
Entrance Width:	600
Entrance Height:	700
Entrance Position Option:	Front/Back
Shaft Width: D	970
Shaft Depth: E	680
Landing doors	Lower Level: Bi-parting shutter Upper Level: Hinged door
Serving Height	Lower Level: F 900 Upper Level: Floor Level
Headroom: G	1000
Pit Depth: J	-

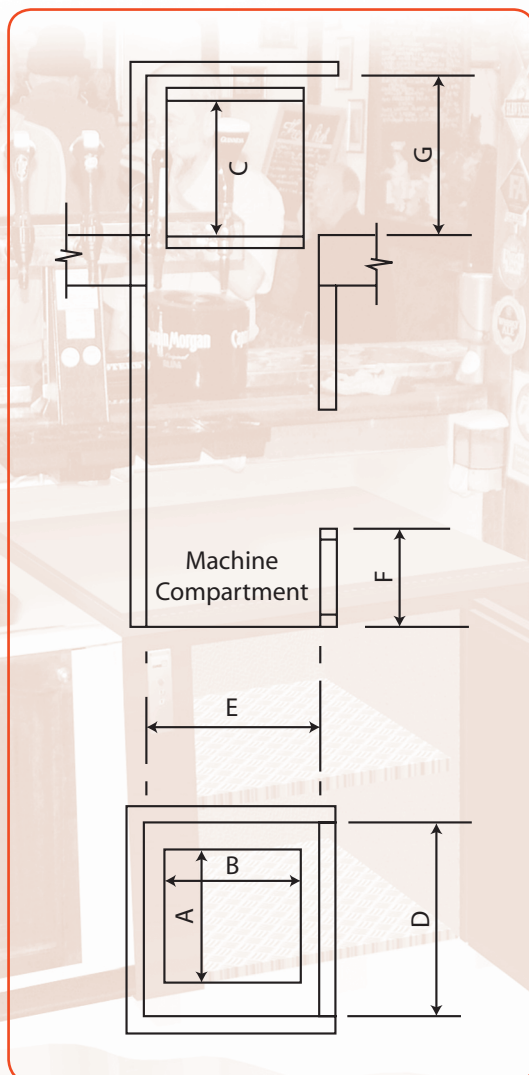

*** Aluminium roller shutters can be fitted to car entrance but additional headroom will be required.**

Non standard sizes available.

GEORGE JOHNSON LIFTS LTD

Arch 196 • Bellenden Road • London SE15 4QJ • T: +44 (0)20 7732 4444 • F: +44 (0)20 7732 5565

Brochure designed by Sovereign Media © 2007 - 08453 703603 - font: 'Myriad Pro' family • Spot Colour: Pantone 172c & Cool Gray 10c