

Domestic Hand Lifts

Business Hand Lifts

Power-Lift (Scissor)

Microlift (Waist Level)

Trolley Lift (Floor Level)

BKG Lift (Waist Level)

BKG Lift (Floor Level)

BKG Under Bar Lift

+44 (0)20 7732 4444

www.george-johnson-lifts.com



A wide range
of the smaller service
lifts, usually in stock
and available.

PHONE NOW FOR A QUOTATION
020 7732 4444



K
U
O
F
S

- COST EFFECTIVE SOLUTIONS •
- EFFICIENT WORK SPACE •
- TIME SAVING TRANSPORT •
- UP-TO-DATE CONSTRUCTION •
- EXPERIENCED ENGINEERS •

S
E
L
E
C
T
E
D

Microlift

W A I S T L E V E L

CAPACITY 50kg or 100kg

STRUCTURE Fitted with a galvanised self supporting steel structure. Cladding around the lift by others.

FLOORS SERVED Up to 12 levels.

ENTRANCE ORIENTATION Can be loaded from as many as 3 different directions with up to 3 landing entrances at each level.

SPEED 0.35 m/sec.

HEADROOM Standard headroom for waist serving lifts could be reduced by modifying standard equipment and lowering serving height at top level to 700 mm.

LOW HEADROOM A special side drive unit is available, only on the 50C model. This will bring the headroom down to 2200 mm.

CAR Steel panel construction, finished in a hardwearing grey baked enamel, floor and removable shelf in stainless steel. Stainless steel finish and additional shelves are available.

CAR DOORS Stainless steel bi-parting car entrance doors are always recommended to prevent misloading and subsequent breakdowns. Galvanised lattice gates are available for the floor serving models.

CLEAR ENTRANCE The entrance doors are always narrower than the car internal dimensions, this needs to be considered when selecting model suitability.

LANDING ENTRANCES Steel bi-parting landing shutters, grey baked enamel finish, light and smooth to operate, complete with matching door surround, 2 hour fire rated as standard. On the floor level models, single hinged doors are provided also baked enamel finish, 2 hour fire rated.

Stainless steel finish is available for both styles of doors with up to 3 landing entrances at each level.

SERVING HEIGHT The standard serving height for all waist level lifts is 800 mm, may be varied to suit customers requirements subject to available headroom.

OPERATION Fully automatic push button control at all landings.

INDICATORS Push buttons illuminate to indicate lift car position. Lift in use / door open indicators also fitted.

DRIVING UNIT Quietly operating geared motor unit fitted to the structure at the top of the lift shaft. Option available for side drive machine on 50C model only.


ELECTRIC SUPPLY 3 phase electric supply is preferable for a more reliable and quieter operation. 1 phase motors are available.

BUILDERS WORK The necessary Associated Builders Work in connection with, but not included in, the supply of the lift is :-

- Cutting the hole through the floor / floors.
- Enclosing the lift on all four sides at all floors, fire rated to comply with Local Authority requirements.
- Running of electric supply to lift.
- Provision of machine compartment door.
- Excavation of lift pit if floor level model required.

Microlift (Waist Level - with Floor Level Option)

Model:	DD50	50A	50B	50C	100A WaistL	100A FloorL	100B WaistL	100B FloorL
Capacity:	50kg	50kg	50kg	50kg	100kg	100kg	100kg	100kg
Car Width: A	510	545	520	620	720	720	820	820
Car Depth: B	320	420	520	620	720	720	820	820
Car Height: C	800	800	800	800	1000	1000	1200	1200
Car Doors:	bi-parting shutter	bi-parting shutter	bi-parting shutter	bi-parting shutter	bi-parting shutter	Lattice gate	bi-parting shutter	Lattice gate
Entrance Width:	320	420	420	520	620	550	720	650
Entrance Height:	770	770	770	770	970	865	1170	1065
Entrance Position Option:	Any 3 directions	Any 3 directions	Any 3 directions	Any 3 directions	Any 3 directions	Any 3 directions	Any 3 directions	Any 3 directions
Shaft Width: D	725	820	800	900	1000	1000	1100	1100
Shaft Depth: E	520	640	800	900	1000	1000	1100	1100
Landing Doors:	bi-parting shutter	bi-parting shutter	bi-parting shutter	bi-parting shutter	bi-parting shutter	Hinged door	bi-parting shutter	Hinged door
Serving Height: F	800	800	800	800	800	Floor Level	800	Floor Level
Headroom: G	2600	2600	2600	2600	2800	2000	3000	2200
Pit Depth: J	-	-	-	-	-	320	-	320

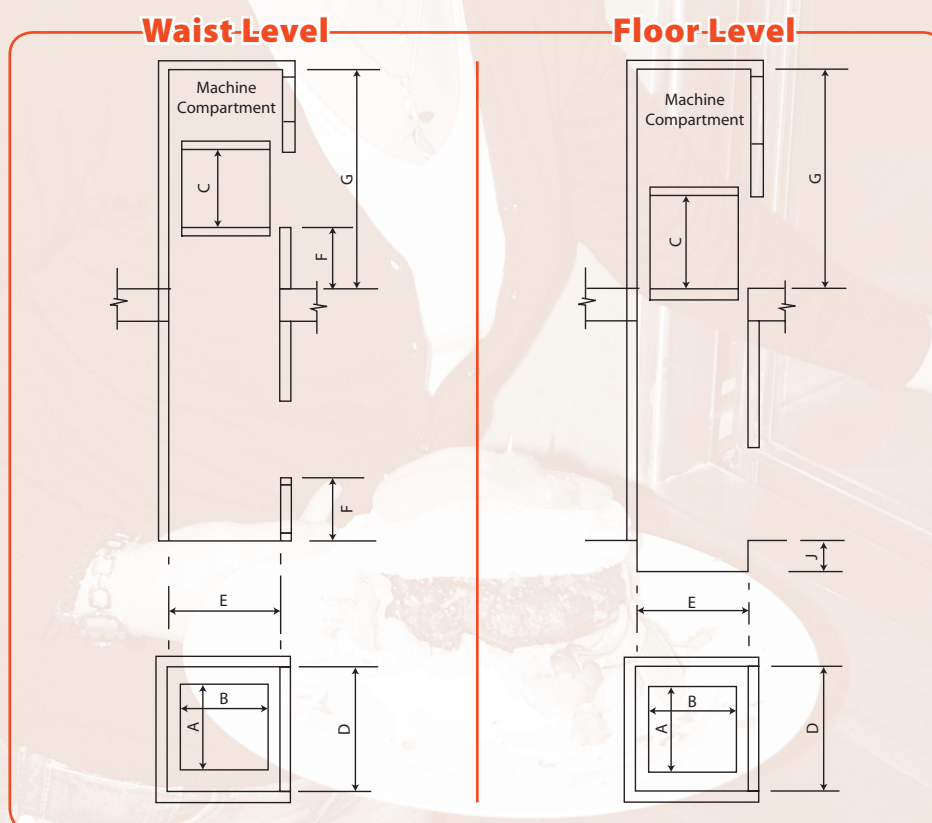

GEORGE JOHNSON LIFTS LTD

Arch 196 • Bellenden Road • London SE15 4QJ • T: +44 (0)20 7732 4444 • F: +44 (0)20 7732 5565

Brochure designed by Sovereign Media © 2007 - 08453 703603 - font: 'Myriad Pro' family • Spot Colour: Pantone 172c & Cool Gray 10c